

**FK** **FUKE** 福客®

**FK450-9**

*Boutique Manufacturing  
Conquer the word with Quality*



## **FK450-9**

Operating Weight:

**45 tons**

Transmission:




**Min. 4.5 km/hr**

Digging reach:

**Min 10.50 m**

Digging height:

**Min 10.0 m**

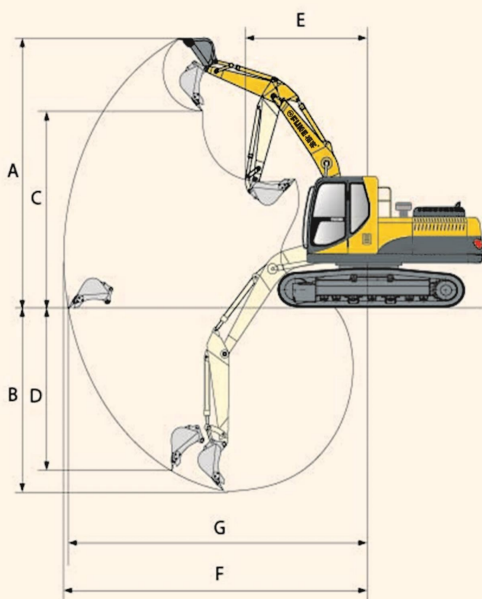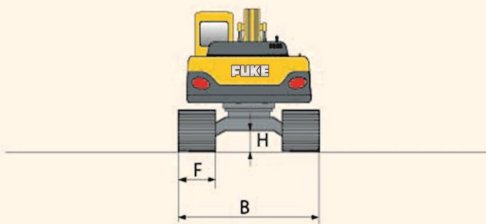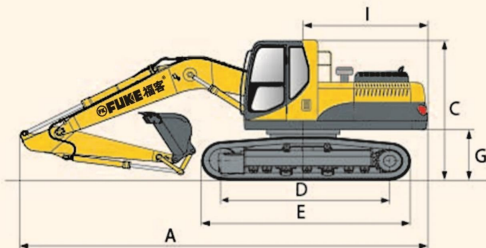

## Engine

Type: The engine is of diesel type, four cycle, 6 cylinders vertical in line, high pressure common rail fuel system, water cooled direct injection

Make & Model: 2022 or onward

Rated Horse power: Engine shall be min 240 @ min rpm 1800

Displacements: Min. 10,500 CC

Bore: Min. 120 mm

Stroke: Min. 140 mm

## General Dimension

verall length: Min 11500 mm

Width: Min 3500 mm

Height: Min 4000 mm (Top of Boom)

Ground Clearance: Min 475 mm

## Working Dimensions

Digging reach: Min 10.50 m

Digging depth: Min 6.0 m

Digging height: Min 10.0 m

Dumping clearance: Manufacturer Standard

Swing radius: Manufacturer Standard

Horizontal digging stroke at ground level: Manufacturer Standard

## Swing system

Swing motor: Axial Piston motor

Brake: Hydraulic Locking Automatically when the Swing Control Lever is in the Neutral Position

Parking Brake: Hydraulic disc brake

Swing Speed: Min 7.5 rpm

Min. front swing radius: Min 4500 mm

## Electrical System

Volt: 24 Vol

Battery: 2X12 Volt, maintenance free battery, 60 AH (min)

Alternator: 24 Volt 50 amp (Min)

Starter: 24 V, 5.0 KW (Min)

The Excavator after sales service and warranty period shall be for 01 (One) Year and during that period at least 12 (Twelve) Complete Servicing must be ensured with required consumables (Engine Oil, Hydraulic Oil, Gear Oil, Air filter, Fuel filter, Water separator etc.)

**安徽福客重工设备有限公司**  
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email: fuke7380@gmail.com

www.fukeonline.com

