

FK11E-35T



FUKU FK11E-35T Basic Information



Rated capacity

3500kg

Self weight

4500kg

Load center

500mm



Customization and assistive devices







Technical Specification

Outline

Model	FK11E-35T
Rated capacity	3500 kg
Load center	500 mm
Lift height	3000 mm
Free lift height	130 mm
Fork size(L*W*T)	1070×125×45 mm
Fork outside spread(Min./Max.)	300/1200 mm
Mast tilt range(F/R)	6/12 deg
Front overhang	490 mm
Length to face of fork(Without of fork)	2730 mm
Length to face of fork(With fork)	3800 mm
Length to face of fork(Wheel width)	1225 mm
Mast lowered height	2095 mm
Mast extended height	4180 mm
Overhead guard height	2130 mm
Turning radius	2510 mm
Min. right angle aisle width	2200 mm
Travel speed (unload/full load)	18 km/h
Lift speed (unload/ full load)	300 mm/s
Self weight	4500 kg
Max. gradeability	15 %
Tires Front	28×9-15-12PR
Tires Rear	6.50-10-10PR
Tread Front	1000 mm
Tread Rear	970 mm
Min. ground clearance:	
Mast unload	152 mm
Mast full load	132 mm
Min. ground clearance:	
Frame unload	158 mm
Frame full load	138 mm
Wheelbase	1700 mm
Rated power of driving motor S2	16 kW
Rated power of lifting motor S2	13 kW
Operating pressure	17.5 mpa
Battery	80V/250Ah V/Ah

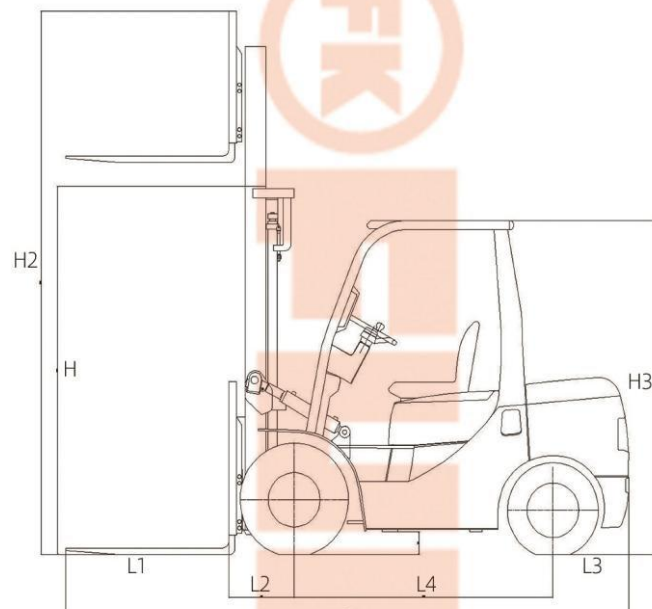

RASA Right-Angle Stack Aisle
a: Safety Clearance
b: Load Length

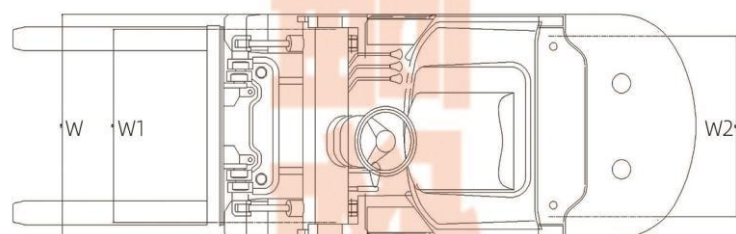

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com