



Basic Information

Diesel tank capacity

56L


Weight unladen

4750 kgs


Rated output/r.p.m

36.8kw

Optional Configuration



Mine working platform

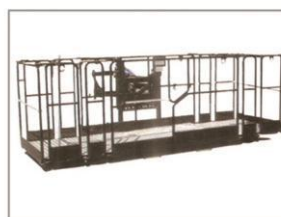


Folding working platform




Fork



Single hook boom

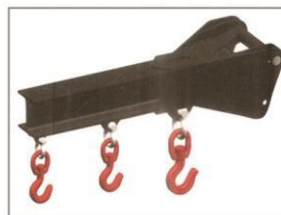

Three hook boom




Hoist



Bucket



Tire Manipulator





Cylinder manipulator

Basic Parameters

Technical Specification

Engine Manufacturer	XINCHAI/XINCHAI 498	
Tier compliant	Tier 2 stage II/Tier 3 stage III	
Engine model	Yuchai	
Engine output (gross power)	36.8 kw	
Cubic capacity	2670/3168 cm ³	
Rated	2600 rpm	
Number of cylinders	4	
Working pressure	190 bar	
Maximum reach boom horizontal(500mm load centre)	2380 mm	
Turning radius	2500 kgs	
Weight unladen	4750 km/h	
Travel speed	20%	
Gradeability(laden/unladen)	25/21	
Transmission	Electro-hydraulic automatic	
Park brake type	Hand	
Tyres(Front)	28x9-15	
Tyres(Rear)	6.50-10	
Diesel tank capacity	56 L	
Lift height	4060 mm	A
Free lift	1400 mm	B
Height(Boom extended)	4680 mm	C
Height of overhead guard	2300 mm	D
Height of operators seat(high/low)	1200/1150 mm	E
Length to fork face	2850 mm	F
Wheelbase	1680 mm	G
Distance from c/l of front axle to fork face	600 mm	H
Distance from c/l of front axle to fork face(full height)	850 mm	J
Load centre	500 mm	K
Lift capacities(with side shifter)	3000 kg	L
Ground clearance(lowest point)	200 mm	M
Ground clearance (wheelbase centre)	190 mm	N
Fork carriage width	1280 mm	O
Maximum width of machine	1400 mm	P
Carriage tilt total*F/B variable through lift arc	111 degrees	Q

Outline

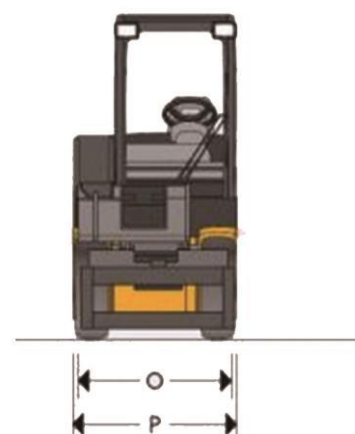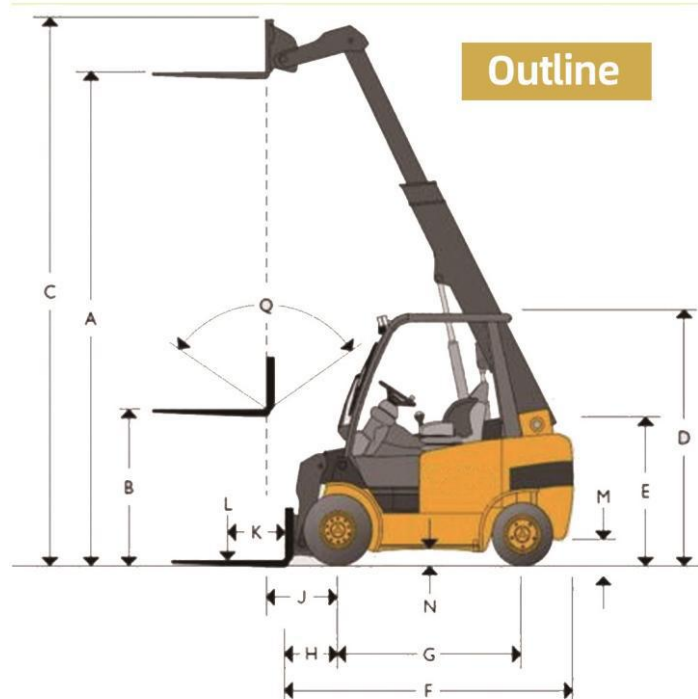

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.