

**FUKU FK33-10 Basic Information**

Volume

10m³

Water tank volume

450L

Wheelbase

1900+2950+1350mm

Displacement




7.684L

Overall mass

13000kg


Rated power

226Kw

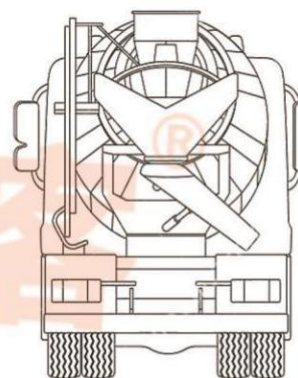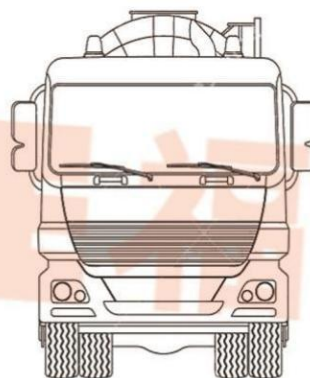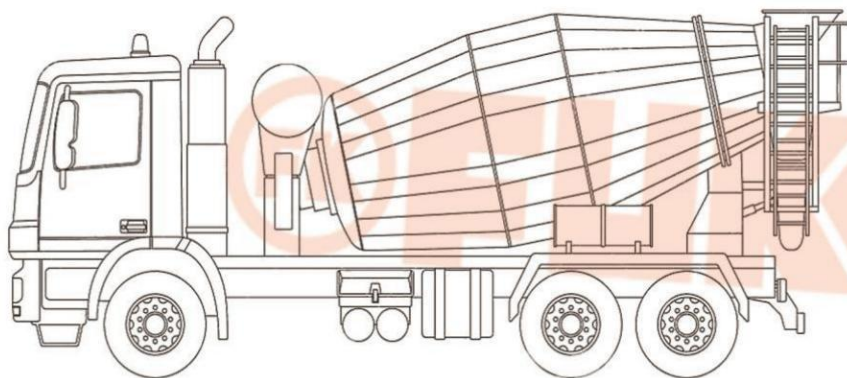

Technical Specification

Volume	10
Chassis	FUKE
Engine	Yuchai
Overall mass	13000kg
Max. permissible total mass	31000kg
Overall dimensions(LxWxH)	9680x2520x3960mm
Wheelbase	1900+2950+1350mm
Min. ground clearance	260mm
Min. turning diameter	22m
Fuel consumption per 100km	≤35L/100km
Braking distance (V0=30km/h)	≤ 10(full load); ≤9(no load)m
Bore*stroke	112x130mmxmm
Displacement	7.684L
Rated power/rpm	226/2500kW/rpm
Maximum torque	1100/1500N-m/rpm
Emission standard	National VI
Feeding speed	≥ 8m ³ /min
Discharge speed	≥ 5m ³ /min
Discharge residual rate	< 0.5%
Slump range	50 ~ 210mm
Water tank volume	450L
Working pressure	0.35-0.38Mpa
Engine	J08E-YK
Cab	Qi Xing

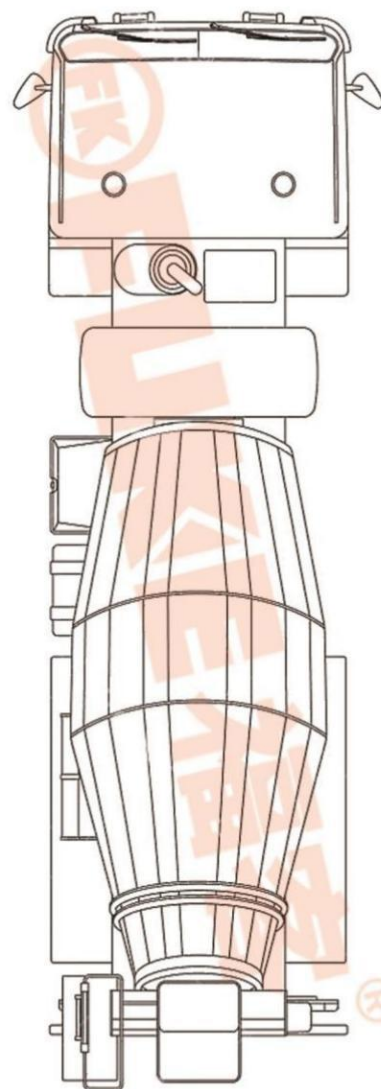

*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com