



Basic Information

Bucket capacity

0.5m³

Rated power

55kw

Displacement

3.168L

Loading Capacity




1000kg

Basic Parameters

Technical Specification

Outline

Engine model	498T
Bore×stroke (mm)	98×105
Rated power (Kw)	55
Rpm	2450
Number of cylinders	4
Max.torque(N.m)	245
Displacement (L)	3.168
Max.Speed (km/h)	12
Tire (track) model	320×84
Loading Capacity(kg)	1000
Lifting	Arc-Shaped Lifting
Bucket capacity(m ³)	0.5
Rated flow(L/min)	75
Tank capacity(L)	80
Weight with bucket(kg)	3800
Height at Max. Extension (mm)	3480
Hinge Pin Height (mm)	2900
Total Height (mm)	2150
Height to bottom of bucket(mm)	2730
Overall length without bucket(mm)	2750
overall length with bucket(mm)	3500
Dumping angle at maximum height(°)	40
Dumping height(mm)	2230
Dumping reach(mm)	715
Rollback at ground position(°)	30
Rollback fully raised at max height(°)	104
Wheelbase(mm)	1500

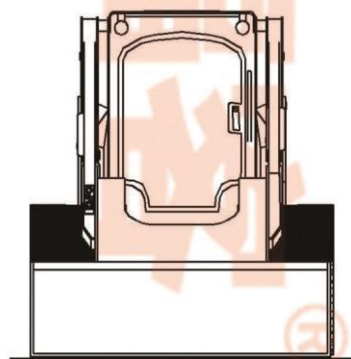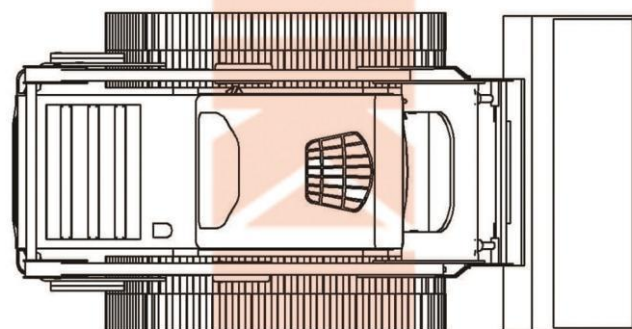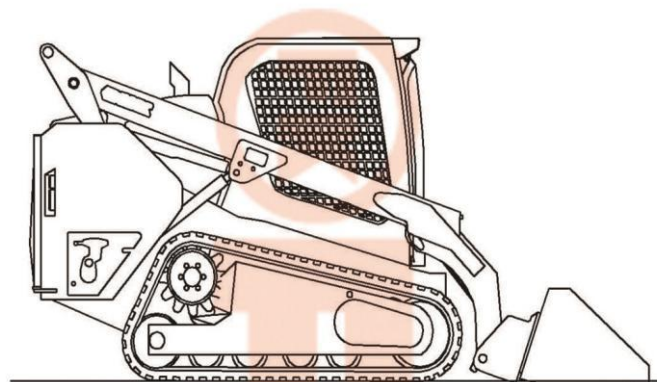

*We follows the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613505697380

Email:fk002@fukebn.com/fuke7380@gmail.com

FUKE Skid Loader Attachments


4 in 1 bucket



Pallet fork



Dozer blade



Snow blade



Grapple bucket



Fork grapple



Backhoe



Backhoe arm



Sweeper



Angle Broom



Breaker



Planer



Trencher



Auger



Vibratory roller



Disk type trencher



Mixer



Snow Blower



*We follow the principle of continuous improvement Product performance parameters will be partially changed due to technical improvements without prior notice.

FUKE

Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:
Phone/Whatsapp: +8613505697380
Email: fk002@fukebn.com / fuke7380@gmail.com